


Properties:

- Capacities of up to 3500t MBL
- Lengths of 0.3m to 75m (longer on request)
- Length tolerances as low as $\pm 10\text{mm}$ (on request)
- Elongation during use $\pm 0.5\%$ (depending on safety factor)
- Working temp. range of -40°C to $+60^{\circ}\text{C}$
- 3 cover options
 - 2,4mm HMPE HEAVY duty
 - 1,3mm HMPE Light duty
 - Polyester
- Slings in compliance with EU directive on machinery (2006/42/EC).

WLL (tonne)	SF	MBL (tonne)	Core diameter (mm)	Minimum bending diameter (mm)	Weight per metre (kg)
10	7	70	34	47	1,5
50	7	350	75	105	4
100	7	700	106	166	7,5
200	7	1400	150	255	13,5
300	7	2100	184	319	19
400	7	2800	212	395	25,5
500	7	3500	237	441	32

*Detail B

*Detail C

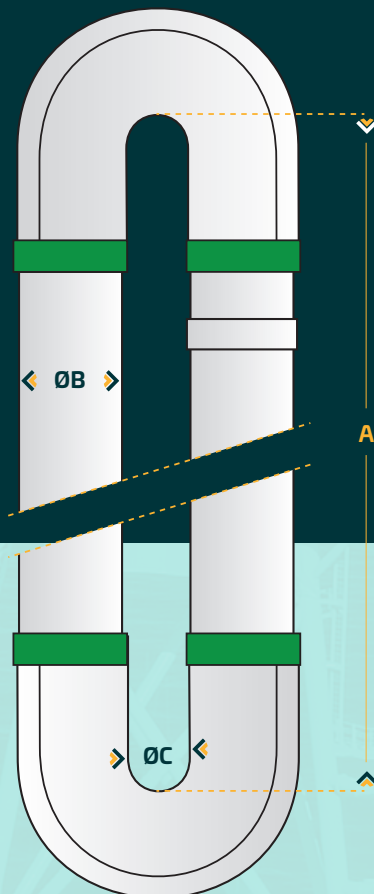

Synthetic fibers

Choose:



Safer



Sleeker



Precision



Durable



Lighter



Refurbishable