

KITO

Manual Chain Hoist CB Model up to 50 t

Easy handling
Long-lasting and
reliable



- > **Double casing**
for protection against
dust and water
- > **Impact proof
gear casing**
resistant against
exterior impacts
- > **Precise gear
mechanism**
smooth and easy
handling

Made in Japan!

Source: Meyer Werft

www.kito.net



Kito Europe GmbH
 Heerdter Lohweg 93
 D-40549 Düsseldorf
 Tel. + 49 (0) 211 - 52 80 09 - 0
 Fax + 49 (0) 211 - 52 80 09 - 59
 info@kito.net
 www.kito.net

Wide hook opening
 top and bottom hook

High performance brake
 safety beyond the regular
 limits

Nickel plated load chain
 grade 100 (V) (1000N/mm²),
 in accordance with standard
 EN 818-7

Chain guide
 silent and easy operation

KITO HEBEZEUGE

Mit Sicherheit das Original


Optional chain bucket:

Weather-proof canvas. Recommended for large lifting heights

Optional overload limiter:

Protects the operator from faulty operation with overload

Option: Universal Trolleys TS model

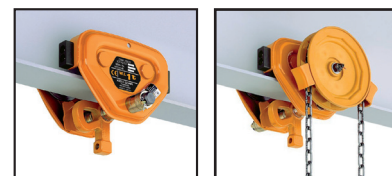

Technical data

Type	Capacity, kg	Standard lift, m	Hand pull to lift full load, daN	Chain pulled to lift load 1 meter, m	Load chain diameter, mm	Chain fall	Net weight, kg	Weight for additional 1 m lift, kg
CB005	500	3,0	23,5	25	5,0 x 15,1	1	11,0	1,5
CB010	1000	3,0	28,4	43	6,3 x 19,1	1	12,5	1,8
CB015	1500	3,0	34,3	57	7,1 x 21,2	1	15,5	2,1
CB020	2000	3,0	35,3	70	8,0 x 24,2	1	20,0	2,3
CB025	2500	3,0	32,3	99	9,0 x 27,2	1	27,0	2,7
CB030	3000	3,0	35,3	114	7,1 x 21,2	2	24,0	3,2
CB050	5000	3,0	33,3	198	9,0 x 27,2	2	41,0	4,4
CB075	7500	3,5	34,3	297	9,0 x 27,2	3	63,0	6,2
CB100	10000	3,5	35,3	396	9,0 x 27,2	4	83,0	7,9
CB150	15000	3,5	36,3	594	9,0 x 27,2	6	155,0	11,4
CB200	20000	3,5	35,3 x 2	396 x 2	9,0 x 27,2	8	235,0	15,8
CB300	30000	3,5	42,1 x 2	495 x 2	9,0 x 27,2	10	310,0	19,2
CB400	40000	3,5	42,1 x 2	693 x 2	9,0 x 27,2	14	480,0	26,2
CB500	50000	3,5	48,0 x 2	792 x 2	9,0 x 27,2	16	640,0	29,7

Disclaimer:
 KITO does not assume liability for inappropriate usage of products.
 Operating instructions must be followed at all times.
 Subject to technical change, misprint and errors.

Contact
 Kito Europe GmbH / Heerdter Lohweg 93 / D-40549 Düsseldorf
 Tel. +49 (0) 211 / 52 80 09 - 0 / Fax +49 (0) 211 / 52 80 09 - 59
 info@kito.net / www.kito.net

KITO

Manual Chain Hoist Yellow CF Model

Up to 3 t

The fast one

**Sleek smooth design
Robust**



**Step up to Kito
quality and safety**

- > **Increased productivity**
Single reduction gearing
maximizes lifting and lowering
speed and saves time
- > **Aluminium die-cast body**
durable, corrosion-resistant
and lightweight
- > **Double housing**
for protection against dust
and water
- > **Kito NP nickel plated grade
100 load chain**
outstanding corrosion-
resistance, ultra-smooth surface

Made in Japan!

www.kito.net



Kito Europe GmbH

Heerdter Lohweg 93

D-40549 Düsseldorf

Tel. + 49 (0) 211 – 52 80 09 – 0

Fax + 49 (0) 211 – 52 80 09 – 59

info@kito.net

www.kito.net

KITO HOISTS

Always on the safe side

Easy rigging
top hook swivels
and pivots

Aluminium body
corrosion resistant and
lightweight

Maintenance-free
sealed bearings
long lasting

Precision gearing
single reduction for maximum
lifting speed

Wide hook opening
ideal for larger
slings

Nickel plated load chain
grade 100 (V) (1000N/mm²),
in accordance with standard
EN 818-7

**Available in 3 and 6 meter
lift lengths !**

Technical data

Type	CF005	CF010	CF015	CF020	CF030
Capacity, kg	500	1000	1500	2000	3000
Standard lift, m	3,0	3,0	3,0	3,0	3,0
Hand pull to lift full load, daN	30,0	36,0	42,0	40,0	46,0
Chain pulled to lift load 1 meter, m	19	31	41	63	81
Headroom C, mm	325	370	440	510	590
Load chain diameter, mm	5,0 x 15,1	6,3 x 19,1	7,1 x 21,2	6,3 x 19,1	7,1 x 21,2
Chain fall	1	1	1	2	2
Net weight, kg	11,0	13,0	18,0	21,0	28,0
Weight for additional 1 m lift, kg	1,5	1,8	2,1	2,7	3,2

Disclaimer:

KITO does not assume liability for inappropriate usage of products.
Operating instructions must be followed at all times.
Subject to technical change, misprint and errors.

Contact

Kito Europe GmbH / Heerdter Lohweg 93 / D-40549 Düsseldorf
Tel. +49 (0) 211 / 52 80 09 – 0 / Fax +49 (0) 211 / 52 80 09 – 59
info@kito.net / www.kito.net

THE SMALL ONE

Compact, lightweight,
powerful chain hoists


HAND CHAIN HOIST

CX Series - 250 kg & 500 kg

- **Aluminium body**
only 2.4 kg / 4.5 kg net weight
- **Overload limiter**
protection against accidental
overloading
- **Load chain with small
chain pitch**
precise lifting movements



COMPACT BUT EXTREMELY POWERFUL. DISCOVER THE DISTINCT FEATURES OF THE CX SERIES!

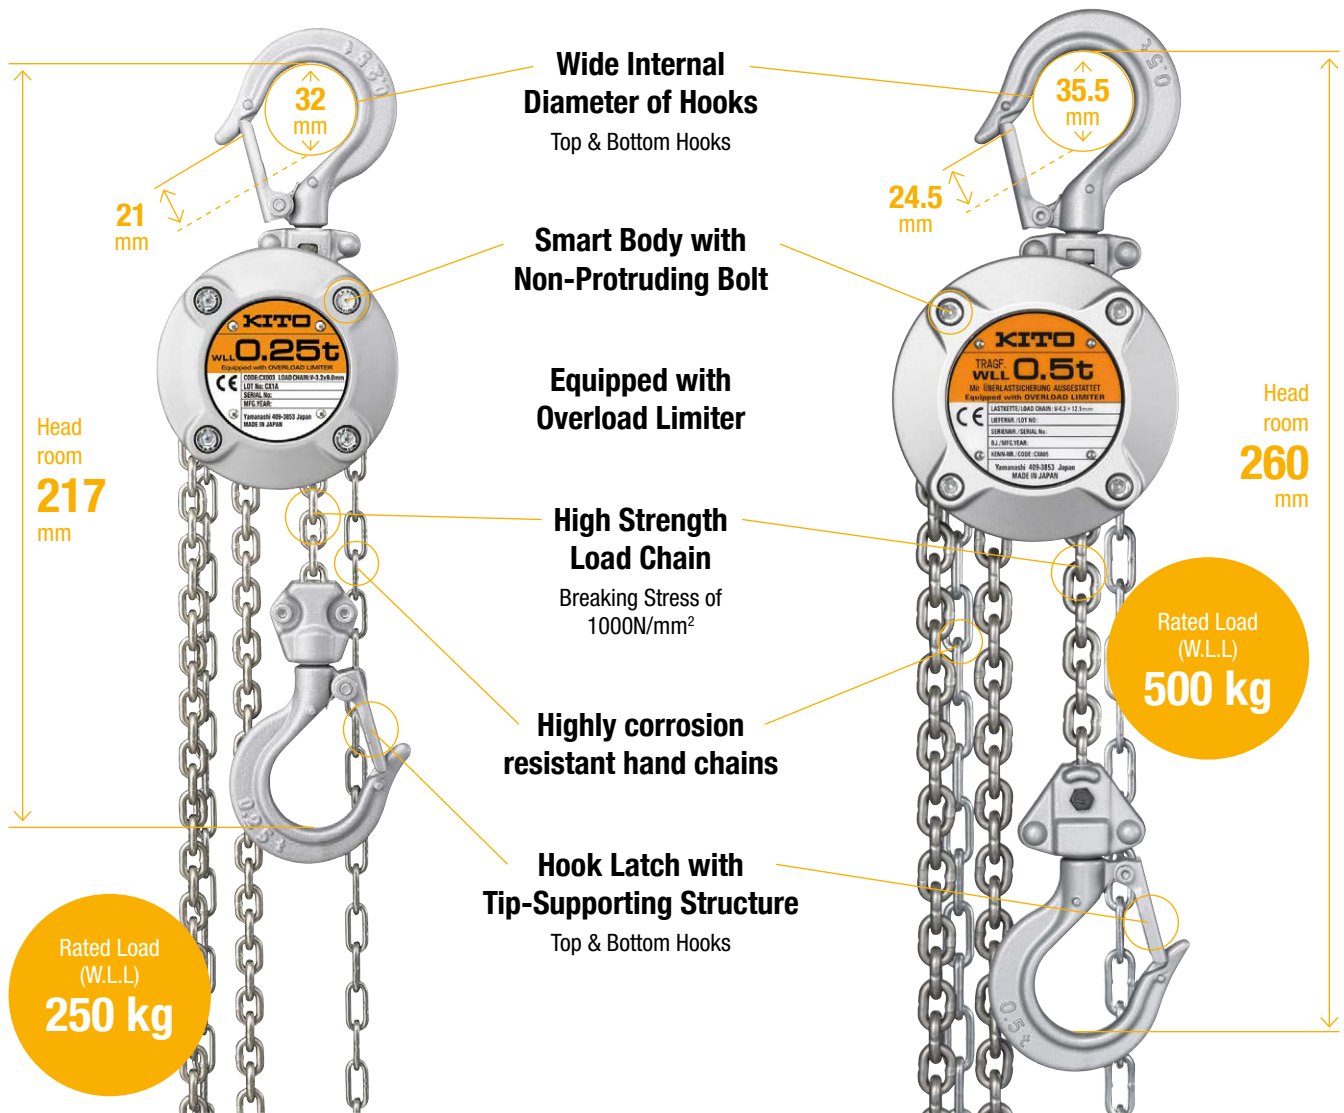


Specifications

Type	CX003	CX005
Capacity, kg	250	500
Standard lift, m	3.0	3.0
Hand chain folded length, m	2.5	2.5
Hand pull to lift full load, daN	14.7	18.7
Chain pulled to lift load 1 meter, m	33.8	42.8
Load chain diameter, mm	3.2 x 9.0	4.3 x 12.1
Chain fall	1	1
Net weight, kg	2.4	4.5
Test weight, kg	375	750
Weight for additional 1 m lift, kg	0.4	0.9

Dimensions (mm)

Type	CX003	CX005
a	88	101
b	84	102
C	217	260
d	53	66
e	37	44
g	21	24.5
s	32	35.5
t	11	12

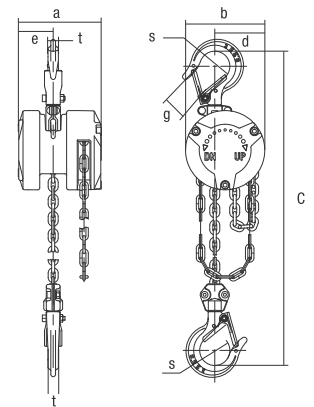

DISCLAIMER: KITO does not assume liability for inappropriate usage of products. Operating instructions must be followed at all times. Subject to technical change, misprint and errors.